



DS 210

Electronic Pressure Switch

Without Media Isolation

accuracy according to IEC 60770:
0.35 % FSO

Nominal pressure

from 0 ... 10 mbar up to 0 ... 1000 mbar

Contacts

1, 2 or 4 independent contacts
freely configurable

Analogue output

2-wire: 4 ... 20 mA
3-wire: 4 ... 20 mA / 0 ... 10 V
others on request

Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module

Optional versions

- ▶ **IS-version**
Ex ia = intrinsically safe for gases
- ▶ customer specific versions




The electronic pressure switch DS 210 is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and has been specially designed for measuring of very small overpressure and for vacuum applications. Permissible media are gases, pressurized air and thin non aggressive media.

As standard the DS 210 offers a PNP-contact and a rotatable display module. Additional features like e.g. an intrinsically safe version, max. four contacts and an analogue output complete the profile.

Preferred areas of use are

-  Plant and machine engineering
-  Heating and air conditioning
-  Laboratory techniques



Input pressure range													
Nominal pressure gauge	[mbar]	-1000 ... 0	10	16	25	40	60	100	160	250	400	600	1000
Overpressure	[bar]	3	0.2	0.2	0.5	0.5	0.5	1	2	3	3	3	3
Burst pressure	[bar]	5	0.3	0.3	0.75	0.75	0.75	1.5	3	5	5	5	5

Contact ¹	
Standard	1 PNP contact
Options	2 independent PNP contacts 4 independent PNP contacts (possible with M12x1, 8-pin for 4 ... 20 mA/3-wire; 0 ... 10 V/3-wire on request)
Max. switching current	4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; $V_{\text{switch}} = V_S - 2V$ 0 ... 10 V / 3-wire: contact rating 125 mA, short-circuit resistant
Accuracy of contacts ²	standard: $\leq \pm 0.35\%$ FSO nominal pressure ≤ 100 mbar: $\leq \pm 0.5\%$ FSO
Repeatability	$\leq \pm 0.1\%$ FSO
Switching frequency	max. 10 Hz
Switching cycles	$> 100 \times 10^6$
Delay time	0 ... 100 sec

¹ max. 1 contact for 2-wire current signal with plug ISO 4400 as well as 2-wire current signal with Ex-protection
no contact possible with 3-wire in combination with plug ISO 4400

Analogue output (optionally) / Supply	
2-wire current signal	4 ... 20 mA / $V_S = 13 \dots 36 V_{DC}$ permissible load: $R_{\text{max}} = [(V_S - V_{S \text{ min}}) / 0,02 \text{ A}] \Omega$ response time: < 10 msec
2-wire current signal with Ex-protection	4 ... 20 mA / $V_S = 15 \dots 28 V_{DC}$ permissible load: $R_{\text{max}} = [(V_S - V_{S \text{ min}}) / 0,02 \text{ A}] \Omega$ response time: < 10 msec
3-wire current signal	4 ... 20 mA / $V_S = 19 \dots 30 V_{DC}$ adjustable (turn-down of span max. 1:5) ³ permissible load: $R_{\text{max}} = 500 \Omega$ response time: < 3 sec
3-wire voltage signal	0 ... 10 V / $V_S = 15 \dots 36 V_{DC}$ permissible load: $R_{\text{min}} = 10 \text{ k} \Omega$ response time: < 3 msec
Without analogue output	$V_S = 15 \dots 36 V_{DC}$
Accuracy ²	standard: $\leq \pm 0.35\%$ FSO nominal pressure ≤ 100 mbar: $\leq \pm 0.5\%$ FSO

² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

³ with turn-down of span the analogue signal is adjusted automatically to the new measuring range

Thermal effects (offset and span)					
Nominal pressure p_N	[mbar]	-1000 ... 0	≤ 100	≤ 400	> 400
Tolerance band	[% FSO]	$\leq \pm 0.75$	$\leq \pm 1.5$	$\leq \pm 1$	$\leq \pm 0.75$
in compensated range	[°C]	-20 ... 85	0 ... 50	0 ... 70	-20 ... 85

Permissible temperatures	
Medium	-40 ... 125 °C
Electronics / environment	-40 ... 85 °C
Storage	-40 ... 100 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326


Mechanical stability	
Vibration	10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6
Shock	500 g / 1 msec according to DIN EN 60068-2-27

Materials	
Pressure port	stainless steel 1.4404 (316L)
Housing	stainless steel 1.4404 (316L)
Display housing	PA 6.6, Polycarbonate
Seal (media wetted)	FKM
Sensor	stainless steel 1.4404 (316L), silicon, Epoxy or RTV, glass
Media wetted parts	pressure port, seal, sensor

Explosion protection (for 2-wire current signal)	
Approval AX14-DS 210	IBExU 06 ATEX 1050 X zone 1: II 2G Ex ia IIC T4 Gb (connector) / II 2G Ex ia IIB T4 Gb (cable)
Safety technical maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C \approx 0 \text{ nF}$, $L_i \approx 0 \mu\text{H}$
Max. switching current ⁴	70 mA
Permissible temperatures for environment	-25 ... 70 °C
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 100 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$


⁴ the real switching current in the application depends on the power supply unit

Miscellaneous	
Display	4-digit, red 7-segment-LED display, digit height 7 mm, range of indication -1999 ... +9999; accuracy 0.1 % ± 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 45 mA + signal current 3-wire signal output voltage: approx. 45 mA
Ingress protection	IP 65
Installation position	any
Weight	approx. 180 g
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

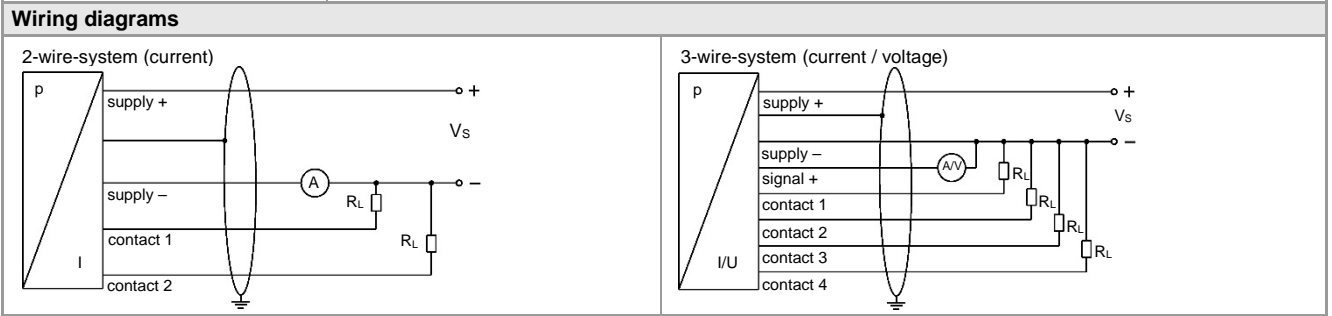



Pin configuration

Electrical connection	M12x1 plastic (5-pin)	M12x1 metal (5-pin)	M12x1 plastic (8-pin)	ISO 4400	Binder series 723 (5-pin)	cable colours (IEC 60757)
Supply +	1	1	1	1	1	WH (white)
Supply -	3	3	3	2	3	BN (brown)
Signal + (only 3-wire)	2	2	2	3	2	GN (green)
Contact 1	4	4	4	3	4	GY (grey)
Contact 2	5	5	5	-	5	PK (pink)
Contact 3	-	-	6	-	-	-
Contact 4	-	-	7	-	-	-
Shield	via pressure port	plug housing/ pressure port	via pressure port	ground contact	plug housing/ pressure port	GNYE (green-yellow)

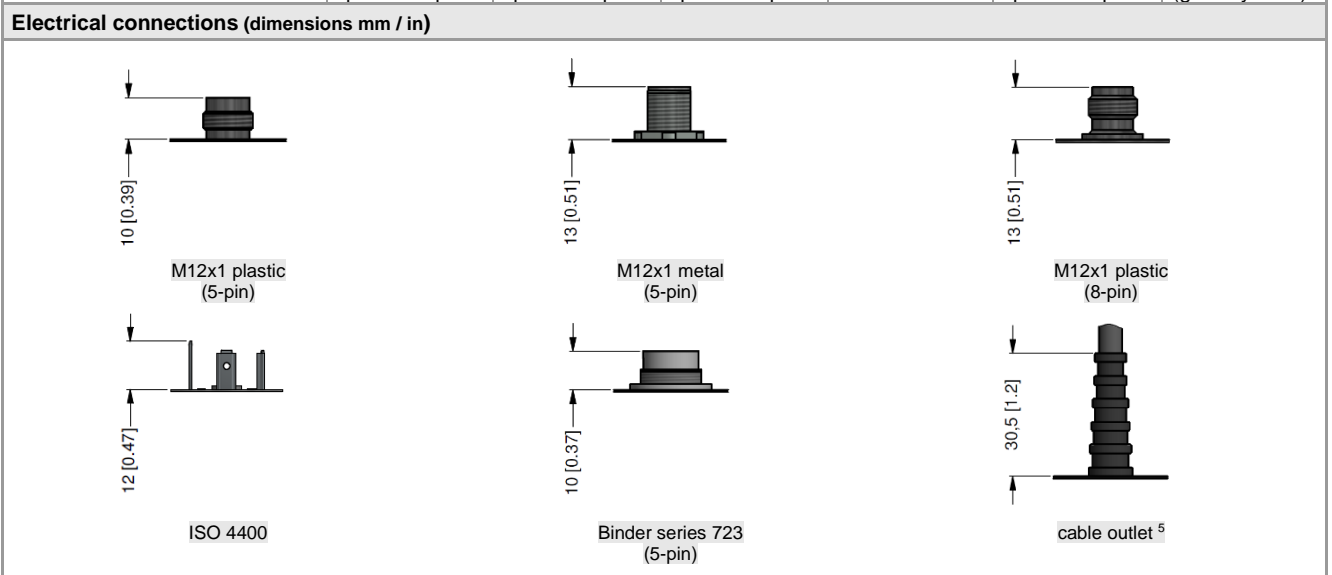


⁵ different cable types and lengths available, permissible temperature depends on kind of cable; standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)


Dimensions (mm / in)

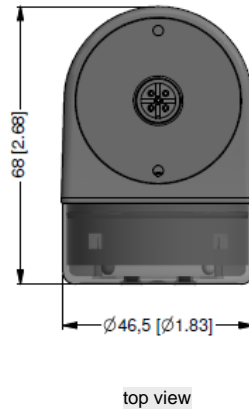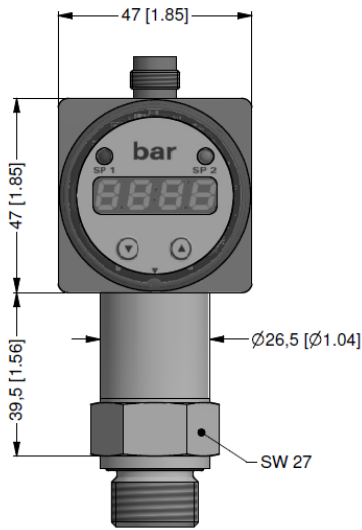


rotatability of display module




Mechanical connection (dimensions mm / in)




G1/2" DIN 3852




G1/2" EN 837




1/2" NPT




G1/4" DIN 3852



G1/4" EN 837



1/4" NPT



G1/2" open port

⇒ metric threads and other versions on request

© 2023 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DS 210

DS 210



Pressure		7	8	A																			
gauge																							
Input	[mbar]																						
	10				0	1	0	0															
	16				0	1	6	0															
	25				0	2	5	0															
	40				0	4	0	0															
	60				0	6	0	0															
	100				1	0	0	0															
	160				1	6	0	0															
	250				2	5	0	0															
	400				4	0	0	0															
	600				6	0	0	0															
	1000				1	0	0	1															
	-1000 ... 0				X	1	0	2															
	customer				9	9	9	9													consult		
Analogue output																							
	without																						
	4 ... 20 mA / 2-wire																						
	0 ... 10 V / 3-wire																						
	4 ... 20 mA / 3-wire, adjustable																						
	intrinsic safety 4 ... 20 mA / 2-wire ¹																						
	customer																					consult	
Contact																							
	1 contact ^{1,2}																						
	2 contacts ^{1,2}																						
	4 contacts ³																						
Accuracy																							
	standard for p _N > 0.1 bar:																						
	0.35 % FSO																						
	standard for p _N ≤ 0.1 bar:																						
	0.5 % FSO																						
	customer																						consult
Electrical connection																							
	male plug M12x1 (5-pin) / plastic version																						
	male plug M12x1 (8-pin) / ³ plastic version																						
	male plug M12x1 (5-pin) / metal version																						
	male and female plug ISO 4400 ²																						
	male plug Binder series 723 (5-pin)																						
	cable outlet with PVC cable ⁴																						
	customer																						consult
Mechanical connection																							
	G1/2" DIN 3852																						
	G1/2" EN 837																						
	G1/4" DIN 3852																						
	G1/4" EN 837																						
	G1/2" DIN 3852 open pressure port																						
	1/2" NPT																						
	1/4" NPT																						
	customer																						consult
Seal																							
	FKM																						
	customer																						consult
Special version																							
	standard																						
	customer																						consult

¹ with IS version max. 1 contact is possible

² with connector ISO 4400 and output 2-wire version only max. 1 contact possible; with 3-wire version no contact possible

³ 4 contacts and M12x1, 8-pin only possible in combination and together with 4 ... 20 mA/3-wire; 0 ... 10 V/3-wire on request

⁴ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C), others on request